


20ft ISO Containerized air filter for activated carbon

20.FK/A20.OF-00.00 Rev.:00

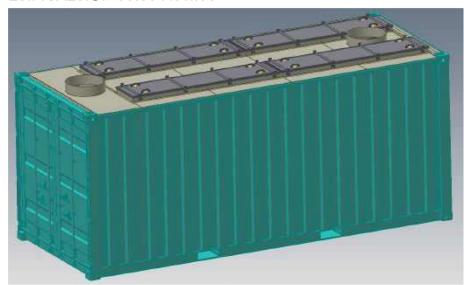



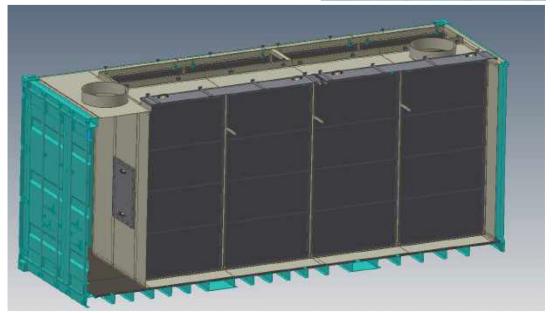

Uniteam has an extensive experience in design, supply and rental of ISO Containers. We offer these types of products in different sizes and designs, according to customer requirements and international standards.

Uniteam ISO containers are standardized steel units used for many different purposes. Units are used within a global containerized intermodal freight transport system, CSC approved and tested according to ISO 1496-1.

Specification

20ft ISO Custom Containerized air filter is suitable for air treatment applications.

- Container has two of bulkheads, 600mm wide for filing of activated carbon.
- Amount of carbon needed for filing the filter is about 14,5 cubic meters
- Containerized air filter is built based on an ISO 668 container.
- Length and width of container is acc. to ISO 668.
- Height of container is increased because of air inlets and hatches.
- Containerized air filter is equipped with corners acc. to ISO1161
- Solution is designed for stationary use. Transport and lifting is allowed for only empty filter (without carbon).
- Air inlet/outlet diameters 600 mm.

	WEIGHT (kg)			EXTERNAL DIMENSIONS (mm)			INTERNAL DIMENSIONS (mm)		
	TARE	PAYLOAD	MGW	LENGTH	WIDTH	HEIGHT	LENGTH	WIDTH	HEIGHT
20ft ISO Containerized air filter	4000	-	-	6058	2438	2710	-	-	-

